

2 Tonnes | Porta Gantry Series | Adjustable

Specifications											
Capacity (kg)	Model Number	D Height to Lifting Eye (mm)		E Height Increment (mm)	F Height to Top of Beam (mm)		G Width (mm)	H Height to Top of Roller (mm)		A-Frame Weight (kg)	Castor (Ø)
		Min.	Max.		Min.	Max.		Min.	Max.		
2,000	PGAS02000S (Small)	1595	2345	5 x 150	1925	2675	1212	2007	2757	35	150
2,000	PGAS02000I (Intermediate)	2178	3178	5 x 200	2499	3499	1726	2581	3581	50	200
2,000	PGAS02000T (Tall)	2869	4069	6 x 200	3199	4399	2011	3281	4481	56	200


Green shading reflects rental inventory.



Beam Data						
Capacity (kg)	Model Number	Weight of Beam (kg)	A Beam Length (mm)	B Beam Adjustment (mm)	C Clear Operating Span (mm)	
					Min.	Max.
2,000	PGBS02000-3000B	28	3000	2 x 200	1680	2080
2,000	PGBS02000-3920B	37	3920	4 x 200	2200	3000
2,000	PGBS02000-4570B	43	4570	8 x 200	2050	3650
2,000	PGBS02000-6000D	93	6000	8 x 200	3480	5080

Green shading reflects rental inventory.

- A** Beam length
- B** Beam adjustment
- C** Clear operating span
- D** Height to lifting eye
- E** Height increment
- F** Height to top of beam
- G** Width
- H** Height to top of roller

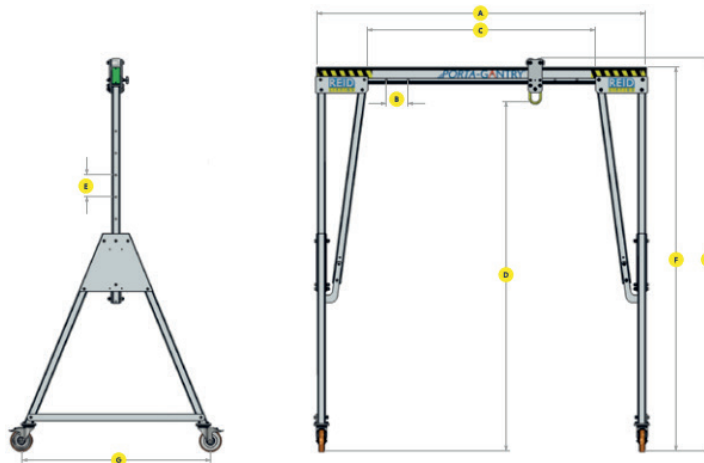

Wind up jacking legs available for use on uneven ground

