

Shackles | 8.5 - 55 Tonnes | Screw Pin

G-4161



Material: bow and pin high tensile steel, Grade 6, quenched and tempered


Safety Factor: MBL equals 6 x WLL

Standard: En 13889 and meets performance requirements of US Fed. Spec. RR-C-271 Type IVA Class 2, Grade A

Finish: hot dipped galvanized

Temperature Range: -40°C up to +200° C

Certificates: at no extra charges this product can be supplied with a works certificate, certificate of basic raw material, manufacturer test certificate and/or EC Declaration of Conformity.

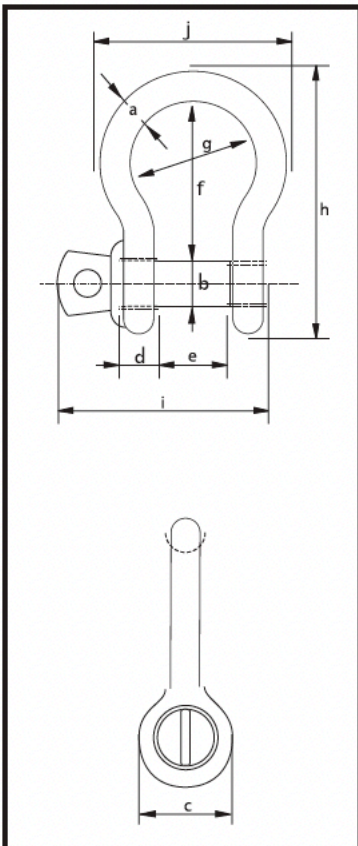

Specifications (mm)

Working Load Limit	Diameter Bow	Diameter Pin	Diameter Eye	Width Eye	Width Inside	Length Inside	Width Bow	Length	Length Bolt	Width	Weight Each
tonnes	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	kg
8.5	25	28	59	25	43	95	68	164	137	118	2.21
9.5	28	32	67	28	47	108	75	186	153	131	3.16
12	32	35	73	32	51	115	83	201	170	147	4.31
13.5	35	38	79	35	57	133	92	227	186	162	5.58
17	38	42	88	38	60	146	99	249	203	175	7.43
25	45	50	104	45	74	178	126	300	243	216	12.5
35	50	57	112	50	83	197	138	332	272	238	17.2
55	65	70	145	65	105	260	180	433	344	310	37.6

Green shading reflects rental inventory.