

Shackles | 120 Tonnes | Alloy Bolt Type

Material: bow and pin high tensile steel, Grade 8, quenched and tempered

Safety Factor: MBL equals 5 x WLL


Finish: hot dipped galvanized

Temperature Range: -20°C up to +200° C

Certificates: at no extra charges this product can be supplied with a works certificate, certificate of basic raw material, manufacturer test certificate, EC Declaration of Conformity and all shackles starting from 150 tons are supplied with a Lloyd's Register of Shipping Certificate on proof load

Note: +5% forging tolerance on inside width and length

P-6036

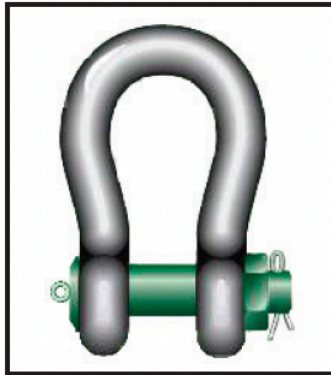

Specifications (mm)

Working load limit	Diameter bow	Diameter pin	Diameter eye	Width eye	Width inside	Length inside	Width bow	Length	Length bolt	Width	Thickness nut	Weight pin	Weight each
tonnes	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	k mm	kg	kg
120	95	95	204	95	147	400	238	644	453	428	50	28.1	114

Green shading reflects rental inventory.

