



Hydraulic Hand Pumps | P Series



Model P-2260

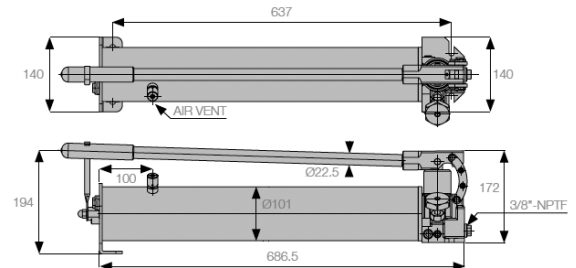

Model P-270

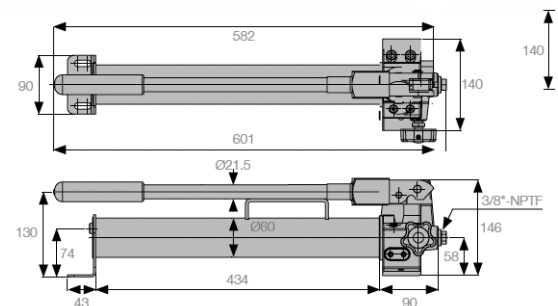

Specifications

Model	Operation	Used with Cylinder	Valve Type	Pressure Rating (bar)		Usable Oil Capacity (cc)	Oil Volumes per Stroke (cc)		Oil Port Thread	Max. Handle Effort (kg)	Weight with Oil (kg)
				1st Stage	2nd Stage		1st Stage	2nd Stage			
P-270	Two Speed	S/A	2 Way	13.8	700	700	13.0	2.8	3/8"-NPTF	41	7.3
P-2260	Two Speed	S/A	2 Way	28.0	700	2,600	30.0	3.0	3/8"-NPTF	36	13.5

Green shading reflects rental inventory.

Two Speed Hand Pumps For Single & Double-Acting Cylinders

Model	Usable Oil (cc)	Pressure Stage	Cylinder Capacity (ton)												
			mm of movement for each stroke of the pump handle	5	10	15	20	25	30	50	75	100	150	200	250
P-270	700	1st		20.8	9.0	6.4	4.6	3.9	3.1	1.8	1.3	1.0	0.6	-	-
-	-	2nd		4.5	1.9	1.4	1.0	0.8	0.7	0.4	0.3	0.2	0.1	-	-
P-2260	2,600	1st		48.0	20.7	14.8	10.6	9.0	7.1	4.2	2.9	2.3	1.5	1.0	-
-	-	2nd		4.8	2.1	1.5	1.1	0.9	0.7	0.4	0.3	0.2	0.2	0.1	-

Green shading reflects rental inventory.