



5.3t Counterweight Offset Lifting Beam | 05T Model

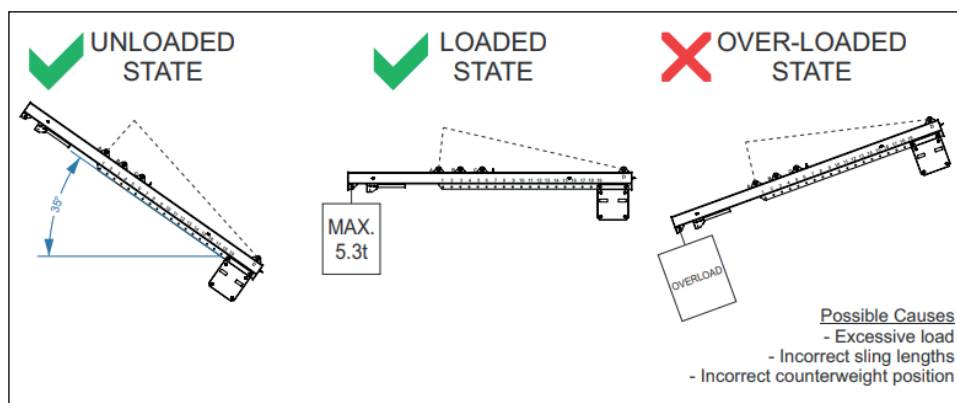


Specifications			
Offset (m)	Minimum Headroom Required (m)	Max. Capacity (m)	Weight of Beam (kg)
2.0	4.3	5,300	3,465
2.5	4.3	2,900	
3.0	4.3	2,515	

Green shading reflects rental inventory.

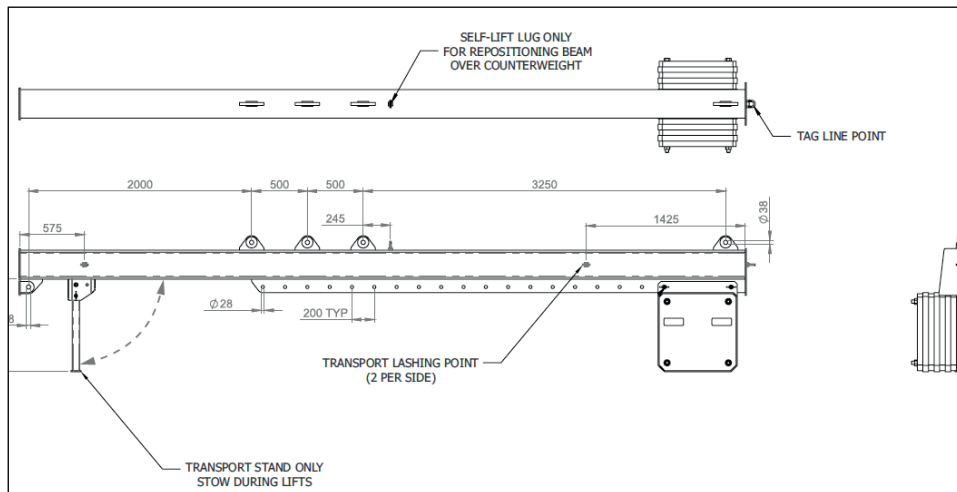

5.3t Counterweight Offset Lifting Beam | 05T Model

Load Chart			
Counterweight Position	Lug A Slings at 7000 & 8100 or 4000 & 5726	Lug B Slings at 7000 & 7860 or 4000 & 5380	Lug C Slings at 7000 & 7645 or 4000 & 5060
19	5.300t	2.990t	2.515t
18	5.045t	2.825t	2.340t
17	4.790t	2.660t	2.165t
16	4.530t	2.495t	1.990t
15	4.275t	2.335t	1.815t
14	4.020t	2.170t	1.640t
13	3.765t	2.005t	1.465t
12	3.510t	1.840t	1.290t
11	3.250t	1.675t	1.115t
10	2.995t	1.510t	0.940t
9	2.740t	1.350t	0.765t
8	2.485t	1.185t	0.590t
7	2.230t	1.020t	0.415t
6	1.970t	0.855t	NOT USED
5	1.460t	0.690t	NOT USED
4	1.460t	0.525t	NOT USED
3	1.206t	NOT USED	NOT USED
2	0.950t	NOT USED	NOT USED
1	0.690t	NOT USED	NOT USED

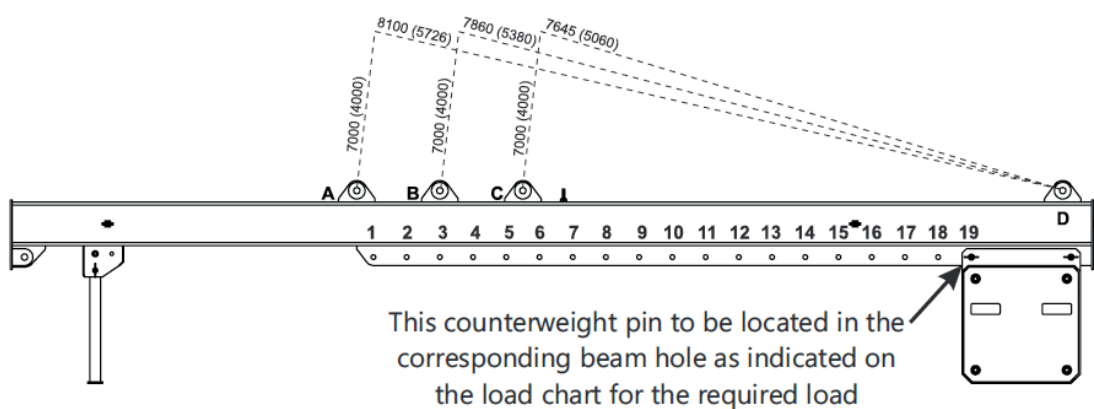

7000mm Sling Leg Lengths

Lug A - Front 7000mm & Rear 8100mm
 Lug B - Front 7000mm & Rear 7860mm
 Lug C - Front 7000mm & Rear 7645mm

4000mm Sling Leg Lengths

Lug A - Front 4000mm & Rear 5726mm
 Lug B - Front 4000mm & Rear 5380mm
 Lug C - Front 4000mm & Rear 5060mm